


Bucher CityFlex CM40e

WSL

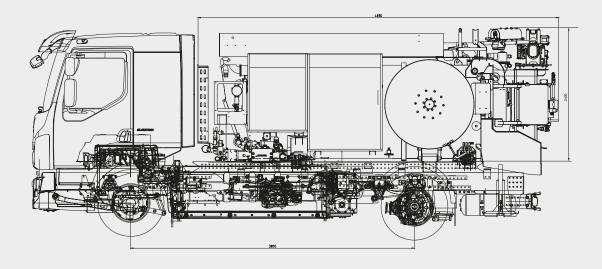

Dimensions and weight (with/without chassis)¹

Length	7,080 mm / 4,830 mm
Height	2,830 mm / 1,950 mm
Width	2,550 mm / Max. 2,550 mm
GVW/Weight	16,000 kg / Approx. 3,480 kg
TARE weight	Approx. 11,000 kg

Chassis^{2,3}

Volvo	FL Electric 4x2
Cabin type	Comfort
Wheelbase	3,800 mm
Mudguards	Plastic
Cyclist protection	Plastic
Rear underrun protection	R58.03
Superstructure item no.	90000033-F401

Engine⁵

Power	Up to 400 kW
Torque	Up to 850 Nm

Transmission

Power take-off	Electric
Jetting and vacuum pumps	Hydraulic driven

Battery, charging system, range*

Four batteries (2	265 kWh)	Li-ion NMC (600 V DC)
On-board charger		6.9 - 22 kW
Charging socke	t	CCS2
Charging time	AC @ 22 l	kW 12h / DC @ 150 kW 3h
Driving	1	km = 1 kWh combined
Jetting	1 h	@ 160 bar = 33.6 kWh
Vacuum	1 h @ 60)% vacuum = 14.4 kWh
Example workd	ay 180 m	in work + 150 km drive

Finish

Corrosion class	ISO 12944 C3 medium
Undercarriage and comp	onents Grey (RAL 7016)
Tank	White (RAL 9016)
Custom tank colour ⁵	Option
Slopped tray	Standard steel (S235)
Hose reel foil	Chevron, one side
Text and stripping	Invoiced separately

- $\ensuremath{^{1}}$ Example with chassis listed in this data sheet.
- ² Chassis assigned to item no. 90000033-F401
 ³ Other chassis also possible.
- Dependent on chassis.
- ⁵ According to standard paint sheet.

*Example with a maxed out battery range. Figures are average estimations only and may vary according to factors such as driving style, environmental conditions, load, wheel fitments, accessories fitted, actual route and battery condition. For comparison purposes only. Real-world figures may differ.

Electric drive to perform all small-scale jetting and vacuum tasks in densely populated areas



Control panel

Intuitive operation thanks to the control panel and remote control.



Suction cassett

Fast set up with the suction hose w. telescope extension up to 2 m.



Battery

Robust and maintenance-free design for maximum service life.



Storage and added equipment

Keep things securely stored in the lockable cabinets with light.

Bucher CityFlex CM40e



Tank

Gross volume	3.8 m ³
Operating pressure	0.5 bar

A hydraulically moved partition divides the tank in two variable water/sludge volume compartments.

Max. water/sludge vol. 3.2 m³ / 2.7 m³

Partition positions Variable

Water indicator Clear hose
Sludge indicator Mechanical float
End cover Hydraulic, fully automatic
Slopped tray Yes
Water filling valve 2", free fall
Bottom emptying valve water tank 2"

Jetting system

Pump	Uraca P3-10
Capacity	127 l/min @ 160 bar
Jetting reel	Primary
Hose	150 m ¾", plastic
Rotation/Swivel	Hydraulic/Manual

Vacuum system

Pump Capacity	CVS 400 345 m³/h (203 cfm)
Top suction val	ve ng mesh 3", pneumatic
Bottom suction	valve 4", manual
Transport valve	
Transport reel Hose	Hydraulic 40 m 3", plastic
Cassette Hose Arm	Hydraulic 14 m 3", plastic 2 m telescope ext., 45° lift with 180° separate swivel

Controls

Controller	CAN-BUS
Control panels	2 pcs.
Remote control (14 functions)	1 pc.

Storage

Cabinets, single	5 pcs.
with roller shutter doors	

Lights

Work lights	5 pcs., LED
Beacon lights	4 pcs., LED
Flash lights	6 pcs., LED

Frost protection

Air pressure draining and cleaning - incl. blow out air hose

Equipment

- Vice
- Cover hook holder
- Cone holder
- Safety fence holder
- Pipe storage 3"
- Protection guards for rear lights
- Hand-washing station

Accessories

- Safety support for rear end cover
- Coupling transition 4" to 3"
- Cover hooks set
- 3" suction pipe for cassette hose
- Nozzle set 3/4" clean water

Contact us for more information.

Bucher Municipal



For local contact and support, please scan the QR code or visit

buchermunicipal.com



