



Bucher Remote Reel

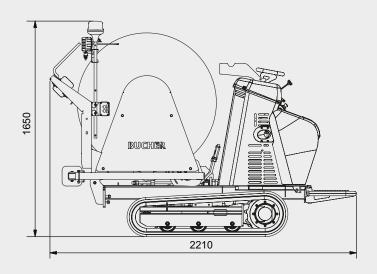



Dimensions and weight

Length (support legs in)	2,210 mm
Length (support legs out)	2,800 mm
Height (without light)	1,525 mm
Height (with light)	1,650 mm
Width (tracked undercarriage in)	830 mm
Width (tracked undercarriage out)	1,056 mm
Weight	850 kg

Inclination

Forward and backward	Max.	20°
Sides	Max.	15°

Item no. 90000037-F102 (with shipping crate)

Undercarriage

Hinowa	TS701
Rubber belt width	180 mm
Track width	756 - 1,056 mm

Motor

MOCOI	
Honda	GX390
Horsepower	11.7 HP
Fuel	Petrol
Gearbox	2-step
Starter	Electric
Oil cooler	Yes

Finish

Corrosion class	ISO 12944 C3 medium
Paint	Red and grey (RAL 7016)

Reach where traditional sewer cleaners units can't



Control panelEasily manage all functions thanks to the intuitive control panel.



Work lamp and beacon Stay safe even at dark with the powerful lamp and beacon light.



Tool tray
Store your work tools on the tray
and take them wherever you go.



Cover hook holder Keep your cover hooks ready to use on the practical holder.

Bucher Remote Reel

Thanks to the smart design of the Bucher Remote Reel you can enjoy an easy start-up and precision manoeuvring.

Quick start

The Bucher Remote Reel connects fast and easy to the existing unit.

Don't stop or delay a day's work due to lack of accessibility. Connect the Bucher Remote Reel to your sewer cleaning unit simple, fast and hassle free.

One person

Its technology ensures the unit can be used by just one operator who benefits from its easy steering and intuitive controls.

A foldable operator platform with shock absorber is located in the rear of the Bucher Remote Reel.

Access to difficult jetting jobs

Across the field or down the basement stairs? Not a problem.

This compact, powerful and versatile machine is ideal for working across uneven surfaces and difficult-to-access terrain where a sewer cleaner cannot reach.

Adjustable undercarriage

The Bucher Remote Reel's adjustable undercarriage increases the safety on stretches with limited accessibility.

The undercarriage's adjustable width gives a safer, more stable manoeuvring in areas where an ordinary sewer cleaner truck cannot get through.

Jetting reel

Hose	200 m 1"
Reel	Tiltable
Rotation	Hydraulic
Free-run function	Yes
Speed	0-4 km/h
Hose guide	Manual

Controls

Control panels	1 pc
----------------	------

Manage the hose reel, speed and width of the undercarriage.

Storage

Tool tray	1 pc.
Cover hook holder	1 pc.

Lights

Work lights	1 stk
Beacon lights	1 stk

Accessories

 Support legs for the tiltable jetting reel (pull-out)

Contact us for more information.

Bucher Municipal



For local contact and support, please scan the QR code or visit

buchermunicipal.com