


Bucher Recycler® RM120

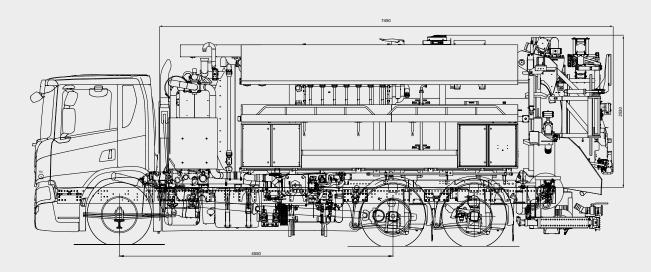

Dimensions and weight (with chassis)¹

Lenght	9,620 mm
Height	3,510 mm
Width	2,550 mm
GVW	26,000 kg
TARE weight	Approx. 18,300 kg

Chassis^{2,3}

Scania	P 420 B6x2*4NA
Cab type	CP17L
Wheelbase	4,550 mm
Mudguards	Plastic
Cyclist protection	Plastic
Rear underrun protection	R58.03

90000029-F101 Item no. superstructure 10000239

Dimensions and weight (without chassis)

Length (superstructure)	7,450 mm
Height (superstructure)	2,530 mm
Width (superstructure)	Max. 2,550 mm
Weight (superstructure)	10,000 kg

Engine⁴

Туре	DC13 176
Horse power	420 HP
Emission level	Euro 6
Fuel	Diesel

Transmission

Power take-off From engine and gearbox Jetting/Vacuum pumps Belt/Hydraulic driven

Finish

Corrosion class	ISO 12	944 C3 medium
Undercarriage an	d components	Grey (RAL 7016)
Tank	V	/hite (RAL 9016)
Custom tank cold	our ⁵	Option
Cabinets, shelve	s, sign plates	Anodised
Slopped tray	Stand	ard steel (S235)
Sign plates	3 pcs., painte	d in tank colour
Text and strippin	ig Invo	iced separately

- ¹ Example with chassis listed in this data sheet. ² Chassis assigned to item no. 90000029-F101 ³ Other chassis (incl. electric) also possible.

- ⁴ Dependent on chassis. ⁵ According to standard paint sheet.

The market's most powerful recycling system



Control panels

Set up, operate and adjust all functions with the control panels.



Hygiene on the go

Keep hygiene on top. Wash your hands with clean, warm water.



Continuous recycling system

Save resources while increasing productivity and sustainability.



Cabinets and Shelves

Store your gear in the shelves and lockable cabinets.

Bucher Recycler® RM120

Tank

Gross volume	13.7 m ³
Operating pressure	1 bar

A pneumatically moved partition divides the tank in two variable water/sludge volume compartments.

Max. water/sludge vol. 11.7 m³ / 10.9 m³
Partition positions 3, lockable

Locking bolts 3 pairs, manual

Water indicator Clear pipe, and screen
Sludge indicator Mech. float, and screen
End cover Hydraulic, fully automatic
Slopped tray Yes
Water filling 2" valve, free fall
Bottom emptying water tank 3" valve

Jetting system

Pump	Uraca KD718
Capacity	392 l/min @ 145 bar
1st. Jetting ree Hose	l Hydraulic 150 m ¾", plastic
2nd. Jetting re	el Hydraulic
Hose	50 m ¾" + 60 m ½", plastic

Vacuum system

Pump CVS	W 1600, load sensing hydr.
Capacity	1,600 m³/h (942 cfm)
Top suction	4" valve, pneumatic
Bottom suction	on 6" valve, manual
Cassette	Hydraulic
Hose	5", rubber
Arm	2 m telescope ext., 45° lift

Water recycling system

Pump	Desmi S80-70-175
Filters	Two. Coarse and fine
Recycling	5-step, automatic, continuous

The system can be turned off so it can be used as a regular combination unit.

Controls

Controller	CAN-BUS	
Control panels	3 pcs.	

Modem for remote access to control system for service/troubleshooting.

Storage

2 pcs.
1 pcs.
5 pcs.

Lights

Work lights	5 pcs.,	LED
Beacon lights	2 pcs.,	LED

Frost protection

Air pressure draining and cleaning - incl. blow out air hose.

Equipment

- Vice
- Cover hooks holder
- Protection guards on rear lights
- Handwashing station in cabinet

Accessories

- Safety support for rear end cover
- Rubber mat in cabinets and tool boxes
- Coupling transitions 6" to 4" and 5" to 4"
- Blind couplings 4" and 6"
- Blowout hose for draining jetting system
- 1.5 m 3" hose w/ couplings for cleaning filter unit, incl. transition 3" to 2"
- 5 m 4" suction hoses with couplings
- 5" suction pipe for cassette hose
- Cover hooks set
- Extra water filters for jetting pump
- Nozzle set 5/4" recycled water

Contact us for more information.

Bucher Municipal



For local contact and support, please scan the QR code or visit

buchermunicipal.com