



## Technical Features



	TF60.16	TF60.18	TF60.20	TF60.22	
A - Clearing width	1600	1800	2000	2200	mm
B - Drums diameter	600	600	600	600	mm
C - Height at front	900	900	900	900	mm
E - Protrusion from coupling level	1450	1450	1450	1450	mm
Blower diameter	600	600	600	600	mm
Clearing capacity	2400	2600	2800	3000	m <sup>3</sup> /h
Max. ejection device rotation	240	240	240	240	°
Transversal inclination angle	+/-10°	+/-10°	+/-10°	+/-10°	°
Throwing distance	30	30	30	30	m
Weight of standard version M	580	650	720	780	kg
Weight of standard version ID	550	620	700	770	kg

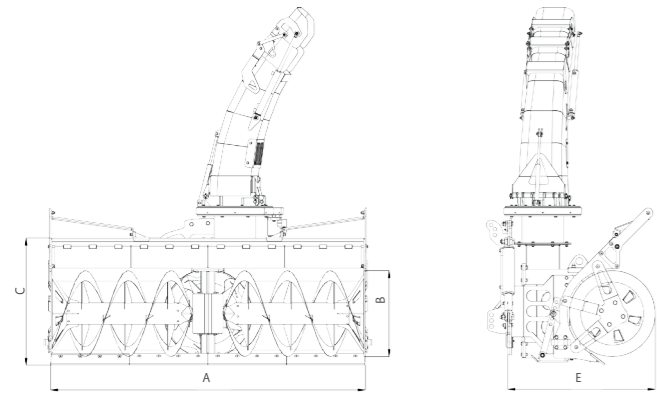

BMU\_TF60\_EN\_rev02 - 11/2015 - The technical data and pictures are indicative and not binding.

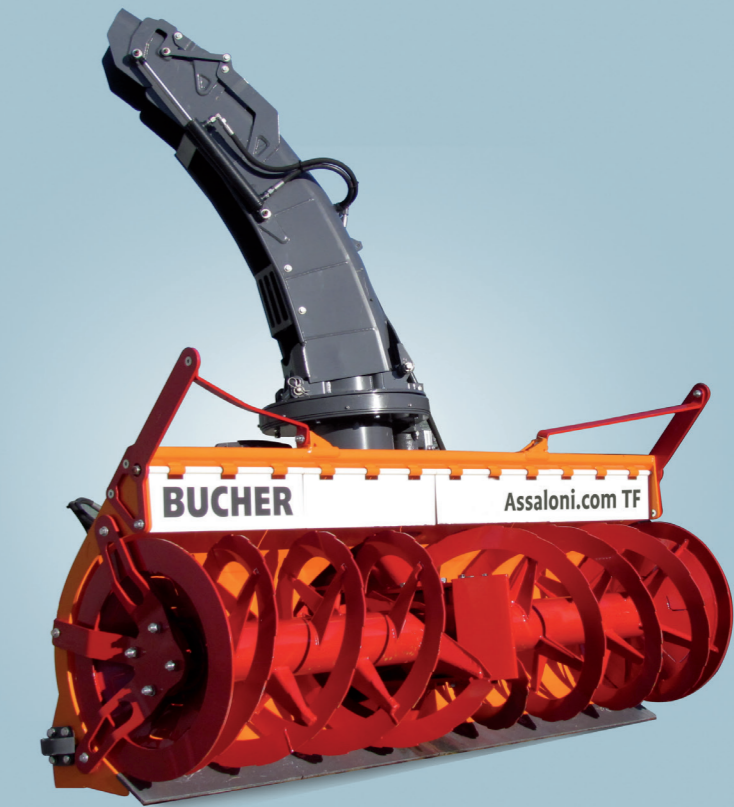

Snow Cutter-Blower

**Gileta SpA**  
 Via A. De Gasperi, 1  
 I-12036 Revello (CN)  
 tel. +39 0175 258 800  
 fax. +39 0175 258 825  
 gileta@buchermunicipal.com


**Assaloni.Com TF60**  
 Front Snow Cutter-Blower

## Assaloni.com TF60

Front snow cutter-blower for light vehicles, suitable for clearing snow and widening passages, also with hard and frozen snow. Mechanically or hydraulically operated.

Two-stage system: the first stage consists of two cutter drums, both held by the same axle, with lateral supports to maintain the perfect alignment; the second stage consists of a high-speed blower tool for snow ejection.

A safety system with automatic resetting clutch safeguards drums and a torque limiter with safety bolt safeguards blower and transmission.

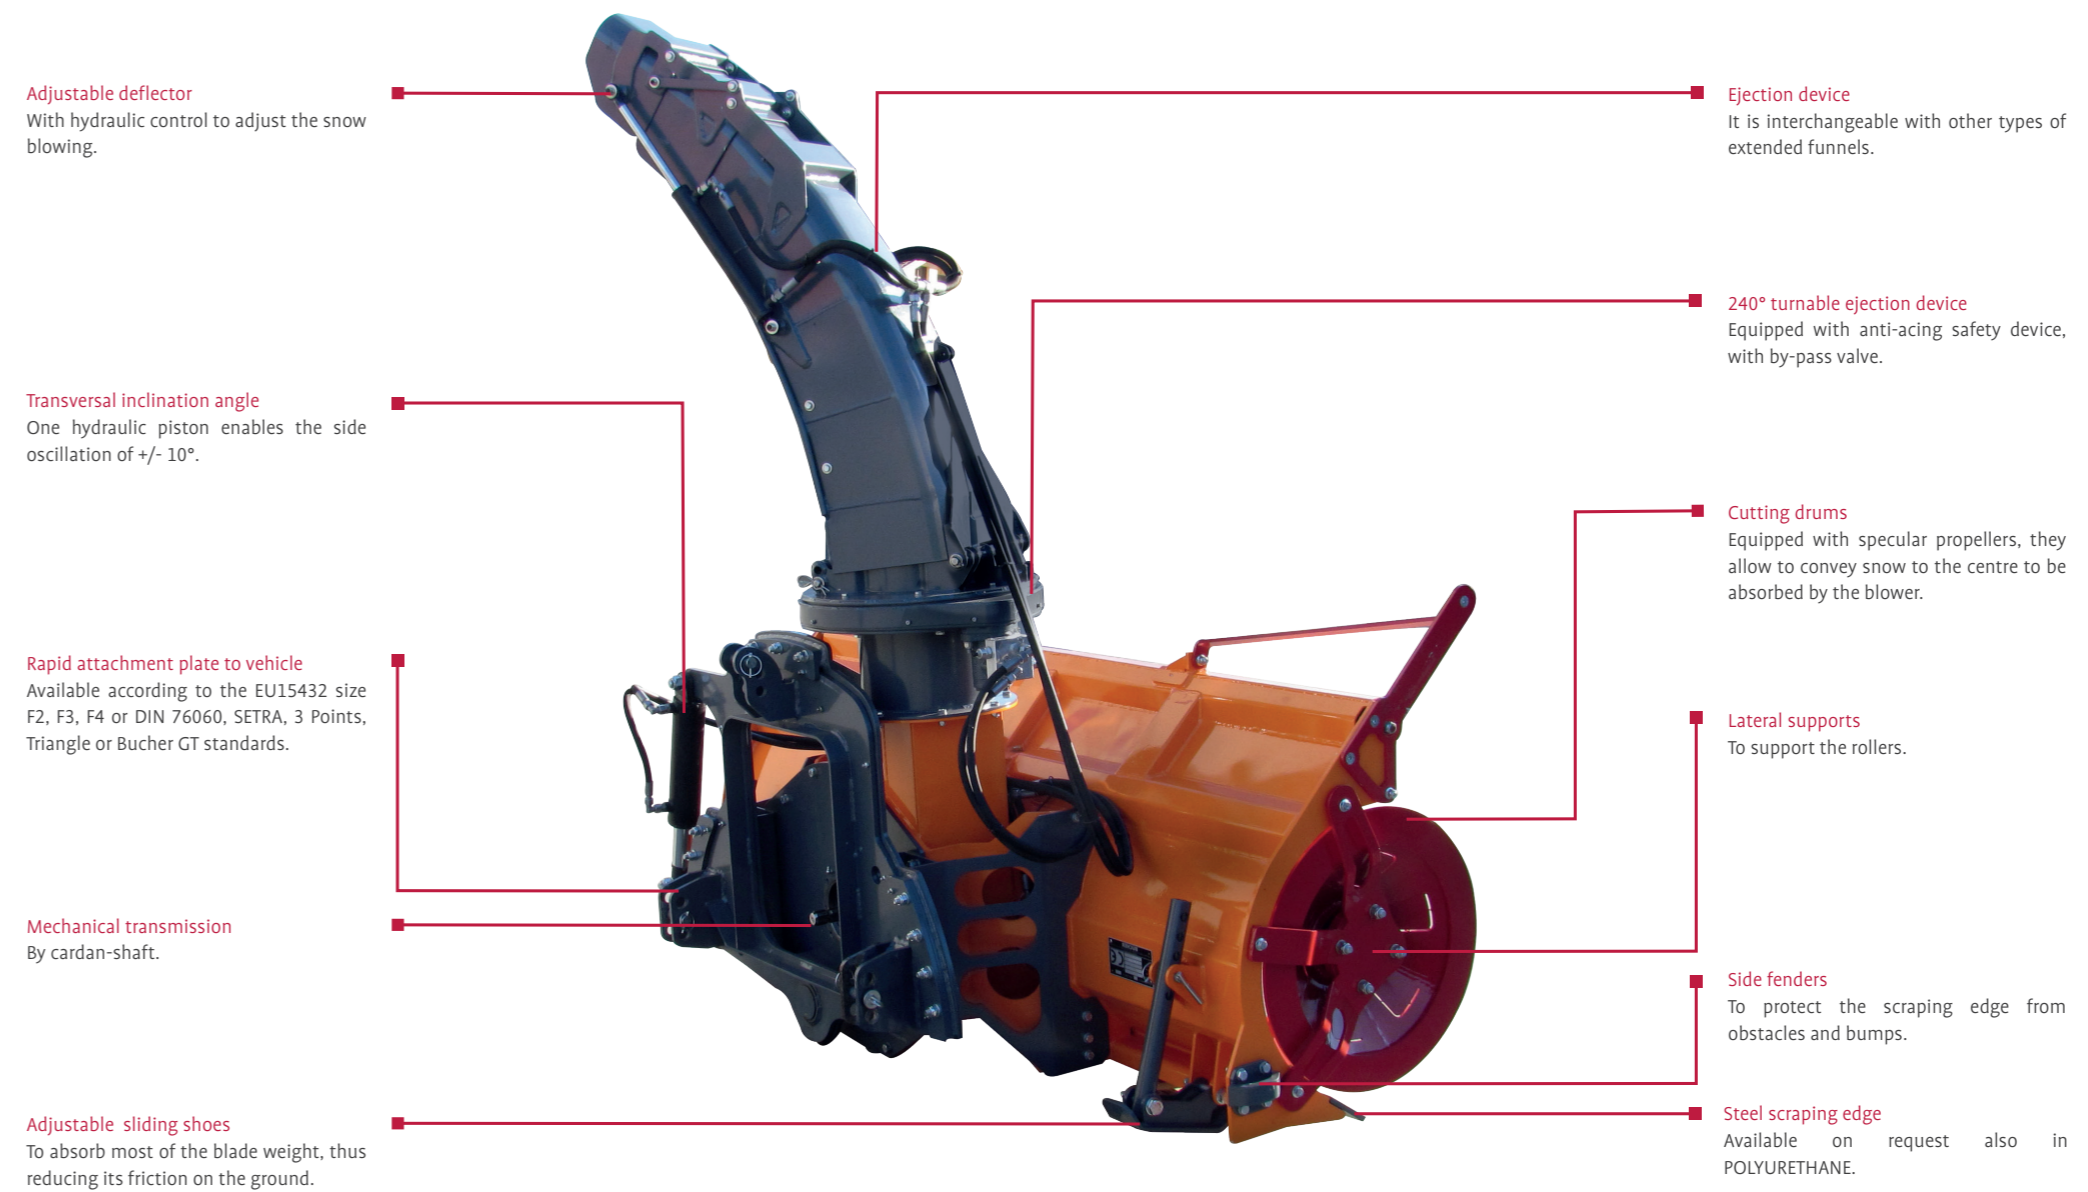

**Adjustable deflector**  
With hydraulic control to adjust the snow blowing.

**Transversal inclination angle**  
One hydraulic piston enables the side oscillation of +/- 10°.

**Rapid attachment plate to vehicle**  
Available according to the EU15432 size F2, F3, F4 or DIN 76060, SETRA, 3 Points, Triangle or Bucher GT standards.

**Mechanical transmission**  
By cardan-shaft.

**Adjustable sliding shoes**  
To absorb most of the blade weight, thus reducing its friction on the ground.

**Ejection device**  
It is interchangeable with other types of extended funnels.


**240° turnable ejection device**  
Equipped with anti-icing safety device, with by-pass valve.

**Cutting drums**  
Equipped with specular propellers, they allow to convey snow to the centre to be absorbed by the blower.

**Lateral supports**  
To support the rollers.

**Side fenders**  
To protect the scraping edge from obstacles and bumps.

**Steel scraping edge**  
Available on request also in POLYURETHANE.



**Loading ejection device**

On request. Suitable for loading snow on trucks.




**Adjustable castor wheels**

Fitted on request, they are used to adjust the height of the scraping edge from the ground.



**Hydraulic motor**

As an alternative to the mechanical transmission, it transmits motion to blower and drums.

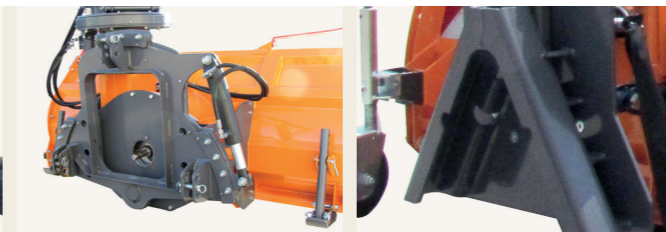

**3 point connection**

For farm tractors available in Cat. 1 and 2



**Triangular coupling**

For farm tractors.



**Front protection**

For road traffic.



**Duplicator valve**

On request, it allows to split a hydraulic control, thus enabling to alternately perform two movements from a single hydraulic line. Tripling version also available.