


Bucher SuperFlex C140

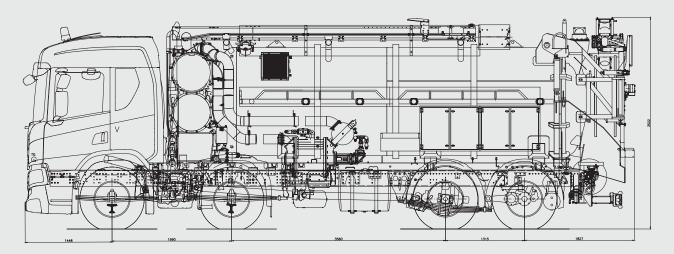

Dimensions and weight

Transmission

Length	399 in (10,139 mm)
Width	100 in (2,550 mm)
Height	138 in (3,522 mm)
Wheelbase	219 in (5,550 mm)
GVW	7,0547 lb (32,000 kg)
TARF weight	Approx. 44 489 lb (20.180 kg)

Power take-off	From engine and/or gearbox
Jetting pump	Belt driven
Vacuum pump	Hydraulic driven

Engine	
Туре	DC13 148
Horse power	450 HP
Emission level	Euro 6
Fuel	Diesel

Chassis	
Scania	P 450 R8v2N7

Cab type CP20N Mudguards Plastic Cyclist protection Aluminium bars on each side Protection grilles On rear lights

Finish

Undercarriage and compor	nents Grey
Cabin and tank	White
Cabinets and shelves	Anodised
Sign plates	3 pcs.
Text and stripping	Invoiced separately

An all-round combination unit for the demanding user



Control panels

Set up, operate and adjust all functions with the control panels.



Movable partition

Adjust your tank's capacity for sludge and water as you need.



Hygiene on the go

Keep hygiene on top. Wash your hands with clean, warm water.



Cabinets and Shelves

Store your gear in the shelves and lockable cabinets.

Bucher SuperFlex C140

Tank

Volume 3,079 UK gal (14 m³)

Operating pressure 14.5 psi (1 bar)

End cover Hydraulic, fully automatic

A pneumatically moved partition divides the tank in two variable sizes keeping sludge and water separated.

Partition positions	3, fixed
Locking bolts	3 sets, manual
Tank level indicator	2, sludge & water
Suction valves top/bott	tom 6", manual
Water filling valve Instantaneous fire cou	2" pling BS336

High-pressure system

Pump model	Uraca KD 718G
Pump capacity	73 UK gpm @ 2,465 psi (333 l/min @ 170 bar)
Jetting hose reel	Hydraulic
Hose size	1" 590 ft (180 m)
Hose size	¾" 164 ft (50 m) + ½" 196 ft (60 m)

Vacuum system

Pump model CVS Vacustar WR 3100 Pump capacity 11,365 UK gpm (51,667 l/min) @ free flow 87% Max. vacuum Suction cassette/hose Hydraulic, 6" Telescope extension 7 ft (2 m) Compressor CVS RSL 400 Compressor capacity 1,264 UK gpm (5,750 l/min) @ free flow

Compressor	op. pressure	14.5 psi (ı bar)

Compressor piping/coupling 2" for emptying, moving partition & air injection

Controls

Controller	CAN-BUS
Control panels	3 pcs.
Storage	
Cabinets, double	2 pcs.
Comfort cabinet	Inside double cabinet.

Tool cabinets 1 pcs.

Warm water, mirror, soap, paper holder.

Hose shelves	2 pcs.	
Tool shelves	2 pcs.	
Lights		
Work lamps	5 pcs., LED	
Flash lights	2 pcs., LED	
Flash bar	1 pcs., LED	
Side lights	6 pcs., LED	

Accessories

- One nozzle set
- One vice
- 4 x 16 ft (5 m) 4" hose incl. couplings
- Blow out air hose with couplings for jetting system draining
- -4×16 ft (5 m) 2" air injection hose with couplings
- One Bauer reduction 6" M to 4" F
- One set of cover hooks
- 6" cassette suction pipe
- 6" suction pipe with 2" air injection connection
- 13 ft (4 m) 6" hose fitted to suction pipe
- One end cover safety support

Contact us for more information.

Subject to change without notice.

Bucher Municipal Ltd

Curtis Road, Dorking Surrey RH4 1XF, UK Tel. +44 (0) 1306 884 722 Fax: +44 (0) 1306 884151

www.buchermunicipal.co.uk