


# Bucher CityCat W20

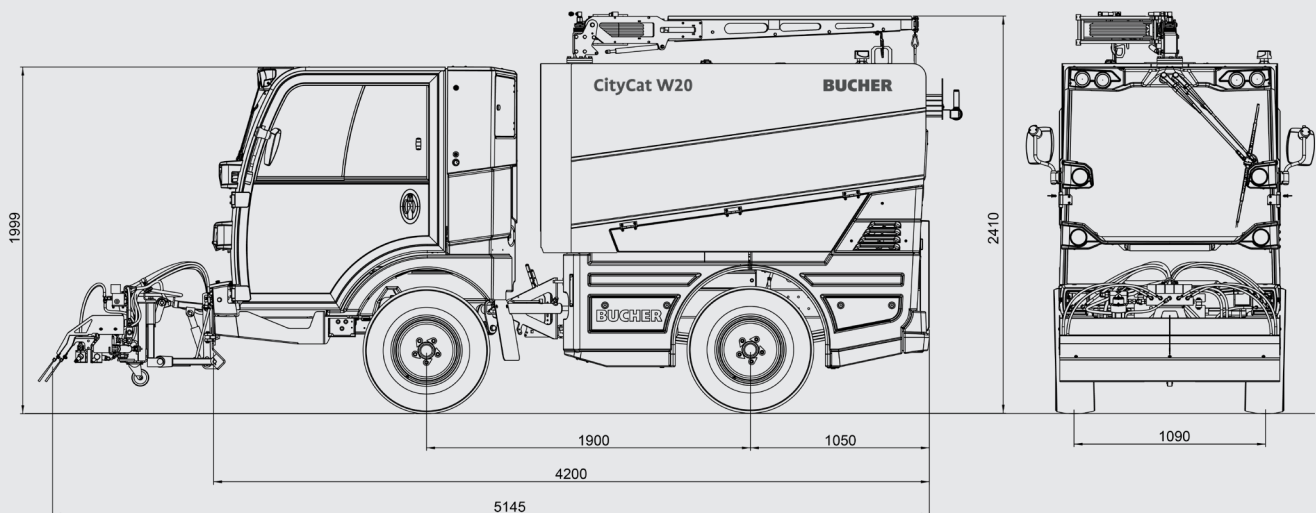

## Dimensions

|                     |         |
|---------------------|---------|
| Length              | 4200 mm |
| Width               | 1300 mm |
| Height              | 1999 mm |
| Height with boom    | 2410 mm |
| Wheelbase           | 1900 mm |
| Track width         | 1090 mm |
| Cleaning width min. | 1300 mm |
| Cleaning width max. | 2400 mm |

## Weight

|              |                      |
|--------------|----------------------|
| Empty weight | 2700 kg <sup>1</sup> |
| Payload      | 2100 kg <sup>1</sup> |
| GVW          | 4800 kg              |

## Emissions

|                             |          |
|-----------------------------|----------|
| Noise level L <sub>WA</sub> | 97 dB(A) |
|-----------------------------|----------|

## Tyres

|                  |
|------------------|
| 215/75 R16 C M+S |
|------------------|

## Drive system

|   |            |
|---|------------|
| Working speed   | 0-15 km/h  |
| Travelling speed  | 0-50 km/h* |
| Climbing ability  | up to 30 % |
| Stepless, hydrostatic drive system. Two speed levels with automatic, load-dependent electronic control. |            |


## Engine

|                     |                      |
|---------------------|----------------------|
| Type                | R754EU6D             |
| Emission standard   | Euro 6d              |
| Engine Displacement | 2970 cm <sup>3</sup> |
| Output              | 62 kW                |
| Torque              | 270 Nm               |
| Fuel tank           | 80 l                 |
| AdBlue tank         | 14 l                 |
| Electrical system   | 12 V                 |
| Battery             | 95 Ah                |

\* According to national legislation

<sup>1</sup> Depending on the respective configuration

## Bucher CityCat W20: the agile compact washer

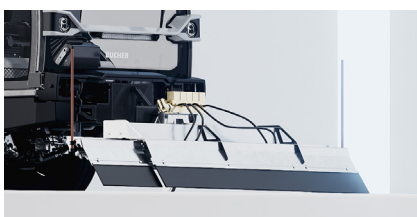

### Telescopic spray bar

The telescopic spray bar is controlled from the cab via the Smart-Con armrest and enables the treatment of areas with a width of 1.3 to 2.4 meters.



### Boom with hose reel and hand lance

The hand lance and water hose with a length of 15 m and an automatic reel are attached to a boom mounted on top of the sweeper and allow 360° cleaning around the washer.



### Low-emission Euro 6d diesel engine

The smooth-running, economical Euro 6d diesel engine delivers demand-driven performance and therefore guarantees low consumption and emission values.

# Bucher CityCat W20

## Chassis

Two-part ladder-type frame chassis with "C" profile construction. Independent suspension with shock absorber and screw spring on the front axle and leaf suspension with shock absorber on the rear axle.

## Axles and steering

Electrically driven front axle with self-flocking differential gear (Torsen differential gear). Articulated steering with load-sensing steering hydraulics.

## Working hydraulics

Electrically driven hydraulic unit with silent gear pumps for steering, auxiliary functions and operation of the telescopic spray bar.

## Brakes

Hydraulic servo dual-circuit brake system with disc brakes on front and rear axle. Parking brake (spring energy brake) acting on the front axle.

## Cab

Comfortably suspended sound-insulated aluminium cab. Windscreen made of heat-reflecting, curved, low-reflection safety glass. Two sliding windows in each door. Variable heater, sun screens, screen wiper with washer. Individually adjustable, sprung driver's seat with headrest and 3-point safety belt. Angle- and height-adjustable steering column.

## Control unit

Smart-Con operation concept includes a multi-functional armrest with smart start function which makes it possible to operate all working functions with one hand. All relevant information at a glance at any time thanks to the digital 4.3 inch display. CSense display (10.1 inch touch display) with intuitive design for extended functions, central overview of all settings and visual diagnostic system. The displayed vehicle set-up can be individually chosen by the driver.

## Water system

The pump is switched off in case of lack of water. The water is filtered at the filling nozzle, before the pump and with a high pressure filter before the spray bar. Pressure adjustable from the cab.

|                |                 |
|----------------|-----------------|
| Max. flow rate | 70 l/min        |
| Max. pressure  | 60 bar          |
| Drive          | hydraulic motor |

## Hopper

Water tank with baffles and an access hole in the roof of the hopper.

|        |              |
|--------|--------------|
| Volume | up to 2000 l |
|--------|--------------|

## Washing system

The telescopic spray bar can be used over a working width of 1.3 to 2.4 meters and is hydraulically swiveled, raised, lowered, and extended and retracted. The spray bar consists of 5 segments which can be switched on and off individually. These are the central spray bar, the extendable spray bars as well as the side flushing nozzles on the right and left.

## Boom with hose reel and hand lance

The boom is equipped with an automatic hose reel and a hand lance mounted on the roof of the hopper. It can be rotated 360° without restriction and is supported on gas pressure cylinders.

|                   |         |
|-------------------|---------|
| Radius boom arm   | 2003 mm |
| Range of operator | 13.5 m  |

## Options

- Air conditioning
- Radio with Bluetooth & DAB+
- High pressure water system
- Detergent injection
- Flags for telescopic spray bar
- LED work lights

A variety of other options are available – contact us for more information.

## Bucher Municipal



For local contact and support, please scan the QR code or visit

[buchermunicipal.com](http://buchermunicipal.com)

**Driven by better**



Bucher Municipal  
E-Shop