


Bucher CityCat VR17e

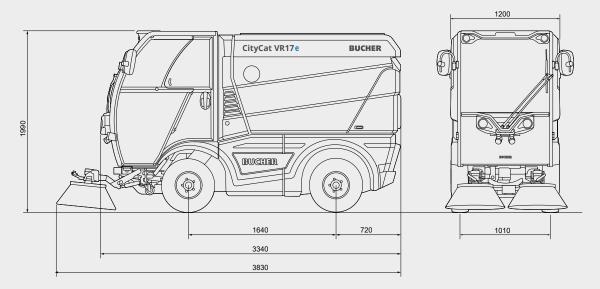

Dimensions

| Length | 3340 mm |
|----------------|---------|
| Width | 1200 mm |
| Height | 1990 mm |
| Cleaning width | 2400 mm |
| Hopper volume | 1.7 m³ |

Weight

| Empty weight | 2100 kg |
|--------------|---------|
| Payload | 1400 kg |
| GVW | 3500 kg |
| | |

Tvres

185/70 R13C 106/104N1

Emissions

| Noise level L _{wA} | 91 dB(A) |
|-----------------------------|-----------------|
| PM certification | PM2.5/PM10 **** |
| | |

Water system

| Fresh water tank | 225 I |
|---------------------------|-----------|
| | |
| Water recuperation system | installed |

Driving Performance

| Working speed | 0-12 km/h |
|---------------------------------|------------------------|
| Travelling speed | 0-40 km/h ² |
| Climbing ability | up to 30 %³ |
| 4-wheel steering (kerb to kerb) | 4370 mm |
| 4-wheel steering (wall to wall) | 5490 mm |

HV Battery

| Battery type | LFP |
|------------------|------------------|
| Battery capacity | 55 kWh |
| Operating time | minimum 10 hours |

Charging system

| On-board charger | 11 kW |
|----------------------------------|--------------|
| Charger inlet | Type 2 |
| Charging time | 4 to 5 hours |
| External charger DC ² | 45 kW |
| Charging time | 60 minutes |

- ¹ Wide base tyres available
- ² According to national legislation
- ³ Empty vehicle

Bucher CityCat VR17e: compact, remarkably agile, yet powerful sweeper



Best-in-class payload for longer shifts

A robust aluminium hopper and impressive 1400 kg payload mean fewer unloads and more sweeping time. The lightweight yet durable build boosts autonomy, while the 225 I fresh water tank supports uninterrupted performance.



Effortless control, accessible to every driver

In the compact 3.5 t class operable with a standard car driver license, every detail is built around the driver — from ergonomic seating and low vibration to single-wheel suspension for a smooth, quiet ride, keeping operations flexible and drivers comfortable.



Agility where it matters most

Best-in-class turning circle of 4370 mm (kerb to kerb) and hydrostatic-controlled four-wheel steering for agile maneuvering through tight urban spaces. Smooth, precise handling that lets operators to clean places larger sweepers can't reach.

Bucher Municipal CityCat VR17e 2/2

Bucher CityCat VR17e

5920 mm

Chassis

Ladder-type frame chassis with "C" profile construction. Single wheel suspension on front and rear axle.

Steering

Electrically driven rear axle with differential gear. Fully hydraulic power steering. Turning diameters:

2-wheel steering

| Keib to keib | 3020 111111 |
|--------------|-------------|
| | |
| Wall to wall | 7170 mm |
| | |

4-wheel steering

| Kerb to kerb | 4370 mm |
|--------------|---------|
| Wall to wall | 5490 mm |

Working hydraulics

Electrically driven hydraulic unit with silent gear pumps for steering, auxiliary functions, and brush drive.

Brakes

Dual-circuit hydraulic servo system with drum brakes on front and rear axle. Electrically activated parking brake on the rear axle. Drum brake design optimized for durability, low maintenance, and reduced particulate emissions.

Sweeping system

Adjustable high-performance suction fan with suction mouth mounted between the front wheels.

Driver's cab

Comfortably suspended sound-insulated cab. Windscreen made of heat-reflecting, curved, low-reflection safety glass. Sliding windows in each door. Variable heater, sun screens, screen wiper with washer. Individually adjustable, sprung driver's seat with headrest and 3-point safety belt. Angle- and height-adjustable steering column.

Control unit

Smart-Con operation concept includes a multi-functional armrest with smart start function which makes it possible to operate all working functions with one hand. All relevant information at a glance at any time thanks to the digital 4.3 inch display. CSense display (10.1 inch touch display) with intuitive design for extended functions, central overview of all settings and visual diagnostic system. The displayed vehicle set-up can be individually chosen by the driver.

Water system

Fresh water volume 225 l

Electrically controlled water pump for the water nozzles.

Hopper

Container made of durable aluminium, can be tilted and closed hydraulically:

| Volume | 1.7 m ³ |
|----------------|--------------------|
| | |
| Dumping height | 1350 mm |

Brushes

| 2 brushes left and right | Ø 800 mm |
|--------------------------|-----------|
| Speed adjustment | 0-120 rpm |

Impact-proof brush suspension.

Options

- Rear view and suction mouth camera
- DC 45 kW fast charging
- Radio with Bluetooth & DAB+
- Wander hose
- High pressure water system
- EasyClean system
- Wide base tyres
- Data capture

A variety of other options are available – contact us for more information.

Bucher Municipal



For local contact and support, please scan the QR code or visit

buchermunicipal.com









