


# Bucher GullyFlex C80

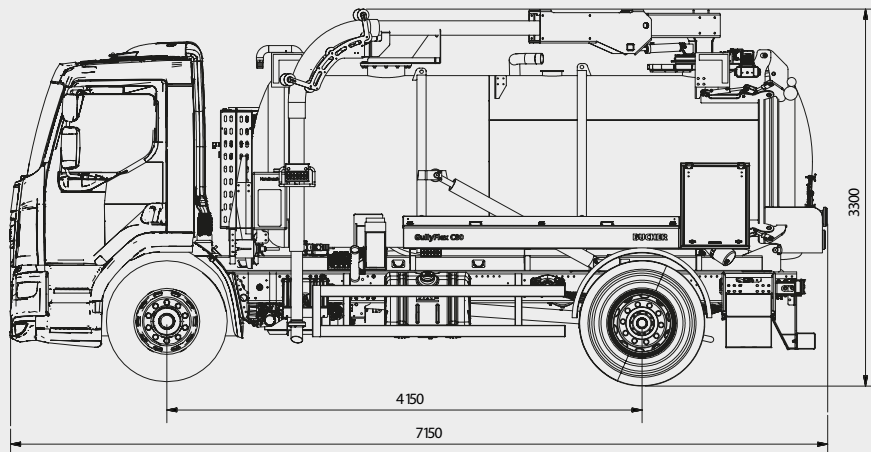

## Dimensions and weight

Length	7,150 mm
Length (tank tipped + cover open)	8,360 mm
Width	2,500 mm
Height	3,300 mm
Height (tank tipped)	5,620 mm
Wheelbase	4,150 mm
GVW	19,000 kg
TARE weight	10,900 kg

## Transmission

Power take-off	From gearbox
Jetting pump	Hydraulic driven
Vacuum pump	Hydraulic driven

## Engine

Type	PX-7
Horse power	325
Emission level	Euro 6
Fuel	Diesel

## Chassis

DAF	LF 320 FA 4X2
Cab type	Day
Mudguards	Plastic
Cyclist protection	One on each side

## Finish

Undercarriage and components	Grey
Cabin/Tank	White
Cabinets and shelves	Grey
Paint	Corrosion class C3
Text and stripping	Invoiced separately

Specially designed for an effective removal of debris on domestic and road gullies



## Controls

Intuitive operation thanks to the push button panels and the display in the cabin.



## Boom

Two hydraulically operated versions available: standard or with telescope extension (option).



## Tipping tank

With dual body tipping cylinders for stability and higher tipping angle for easier unloading.



## Storage and optional equipment

Improve your work day with the diverse storage solutions and available additional equipment.

# Bucher GullyFlex C80

## Tank

Volume	8 m <sup>3</sup>
Operating pressure	7 psi (0.5 bar)
End cover	Hydraulic, 75° opening
Emptying mechanism	45° tipping tank w/ two cylinders

The tank can be divided in two by a fixed partition keeping water and sludge separated.

Standard	0 m <sup>3</sup> water / 8 m <sup>3</sup> sludge
Option 1	1.5 m <sup>3</sup> water / 6.5 m <sup>3</sup> sludge
Option 2*	3 m <sup>3</sup> water / 5 m <sup>3</sup> sludge

\*not available if boom is front mounted

Tank level indicator	2, sludge & water
Valves on rear end cover	
Bottom suction valve	4", manual
Water filling valve	2"

## Vacuum system

Pump model	Jurop DL125HDR
Pump type	Rotary lobe - air cooled
Pump capacity	12,400 l/min
Boom	Hydraulic, with a 300° rotation
Boom placement	Back or front-mounted
Boom working area	Left side (std.) Right side (option) Rear side (option)
Suction hose diameter	4"

## Controls

Controller	CAN-BUS
Push button panels	2 pcs. (CAN-BUS) On boom and under shelf
Display	1 pcs. In the driver's cabin

## Storage

Open tool shelf	1 pcs.
-----------------	--------

## Handwash

Facility w/ heated water	1 pcs.
--------------------------	--------

## Lights

Work lamps	3 pcs., LED
Beacon lights	2 pcs., LED (in addition to those on the chassis )

## Accessories

- One set of cover hooks
- One cover hook holder
- One end cover safety support

## Optional equipment

- 1 pcs. stone box
- 1 pcs. cone holder
- 1 pcs. storage for fence
- 1 pcs. grid lifter
- 1 pcs. cabinets
- 1 pcs. tool shelf with lockable lid
- 1 pcs. vice
- Telescope boom with 1,350 mm ext.
- Cabinet lights
- Suction hose tips (1 m, 1.5 m and 2 m) with or without jetting ring
- Bucher Connect
- High pressure system run with an UDOR CKD pump (35 l/min @ 250 bar) operated with a hand lance and 15 m 3/8" hose in a mechanical and spring retractable hose reel.

Contact us for more information.

## Bucher Municipal



For local contact and support, please scan the QR code or visit

[buchermunicipal.com](http://buchermunicipal.com)

**Driven by better**



Bucher  
Municipal  
E-Shop