

Gmeiner Icebear W


Technical Data

Icebear W dry medium	3500 W	3800 W	4000 W	5000 W	6000 W	7000 W	8000 W
Auger system	2	2	2	2	2	2	2
Container volume m ³	3,5	3,8	4,0	5,0	6,0	7,0	8,0
Container length mm (L)	3.000	3.000	3.000	3.500	3.500	3.500	3.800
Total length mm (GL) ¹	4.219	4.219	4.219	4.719	4.719	4.719	4.719
Container width mm (B)	1.960	1.960	1.960	1.960	1.960	1.960	2.160
Centre of gravity full mm (SB) ¹	1.420	1.430	1.440	1.705	1.715	1.725	1.600
Centre of gravity empty mm (SL) ¹	1.070	1.080	1.090	1.240	1.280	1.110	1.150
Container height sidewall mm (HA)	1.032	1.068	1.092	1.287	1.507	1.727	1.623
Container height centre mm (HM)	1.120	1.156	1.180	1.375	1.595	1.815	1.720
Dead weight "Single Chamber" kg ¹³	1.240	1.260	1.270	1.510	1.650	1.810	1.950
Dead weight "Double Chamber" kg ¹³	1.360	1.380	1.390	1.650	1.810	1.990	2.130
Spread rate salt g/m ²²	5-40	5-40	5-40	5-40	5-40	5-40	5-40
Spread rate split g/m ²²	10-250	10-250	10-250	10-250	10-250	10-250	10-250
Spread range m ²	1-8 / 3-12	1-8 / 3-12	1-8 / 3-12	1-8 / 3-12	1-8 / 3-12	1-8 / 3-12	1-8 / 3-12

¹ Spreader distributor down, long tunnel 700 mm, Spread distributor cover dry medium ² Control Panel Premium ³ Additional weight AbRo-System with container length 3.000 mm = 660 kg, 3.500 mm = 350 kg
Additional weight auxiliary engine = 400 kg

Icebear W Feuchtsalz	3500 W	3800 W	4000 W	5000 W	6000 W	7000 W	8000 W
Auger system	2	2	2	2	2	2	2
Container volume salt m ³	3,5	3,8	4,0	5,0	6,0	7,0	8,0
Container volume liquid salt l	1.520	1.720	1.720	2.150	2.580	2.580	3.280
Container length mm (L)	3.000	3.000	3.000	3.500	3.500	3.500	3.800
Total length mm (GL) ¹	4.254	4.254	4.254	4.754	4.754	4.754	4.754
Container width mm (B)	1.960	1.960	1.960	1.960	1.960	1.960	2.160
Centre of gravity full mm (SB) ¹	1.430	1.440	1.450	1.715	1.725	1.735	1.680
Centre of gravity empty mm (SL) ¹	1.000	1.010	1.020	1.350	1.370	1.280	1.300
Container height sidewall mm (HA)	1.032	1.068	1.092	1.287	1.507	1.727	1.623
Container height centre mm (HM)	1.120	1.156	1.180	1.375	1.595	1.815	1.720
Dead weight "Single Chamber" kg ¹³	1.480	1.500	1.510	1.760	1.910	2.070	2.210
Dead weight "Double Chamber" kg ¹³	1.600	1.620	1.630	1.900	2.070	2.250	2.390
Spread rate salt g/m ²²	5-40	5-40	5-40	5-40	5-40	5-40	5-40
Spread rate split g/m ²²	10-250	10-250	10-250	10-250	10-250	10-250	10-250
Spread rate liquid salt % ²	1-100	1-100	1-100	1-100	1-100	1-100	1-100
Spread range m ²	1-8 / 3-12	1-8 / 3-12	1-8 / 3-12	1-8 / 3-12	1-8 / 3-12	1-8 / 3-12	1-8 / 3-12

¹ Spreader distributor down, long tunnel 700 mm, Spread distributor cover dry medium ² Control Panel Premium ³ Additional weight AbRo-System with container length 3.000 mm = 660 kg, 3.500 mm = 350 kg
Additional weight auxiliary engine = 400 kg

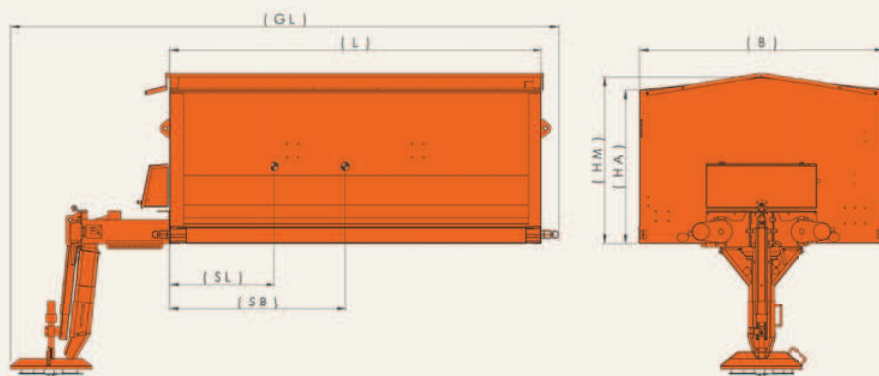

Ask for our detailed technical documents.

We reserve the right to make technical changes and changes to the models. The illustrations may feature special equipment and accessories which are not part of the standard package.

Gmeiner GmbH
Daimlerstraße 18
D-92533 Wernberg-Köblitz
Tel.: +49 9604 93267-0
Fax: +49 9604 93267-49
gmeiner@buchermunicipal.com

Giletta SpA
Via A. De Gasperi, 1
I-12036 Revello (CN)
Tel. +39 0175 258 800
Fax +39 0175 258 825
giletta@buchermunicipal.com